


DIN3202 M3

L242 Two Piece Full Port Ball Valve

Size Range 1/4" - 2" (DN8 - DN50)
 Pressure Rating DIN PN63
 Materials Stainless Steel, Carbon Steel
 End Connection Threaded
 Service Application Water, Oil, Gas, Thermal Fluid,
 Chemicals and others
 Certifications ISO 9001-2008, PED 97/23/EC
 Operation Manual

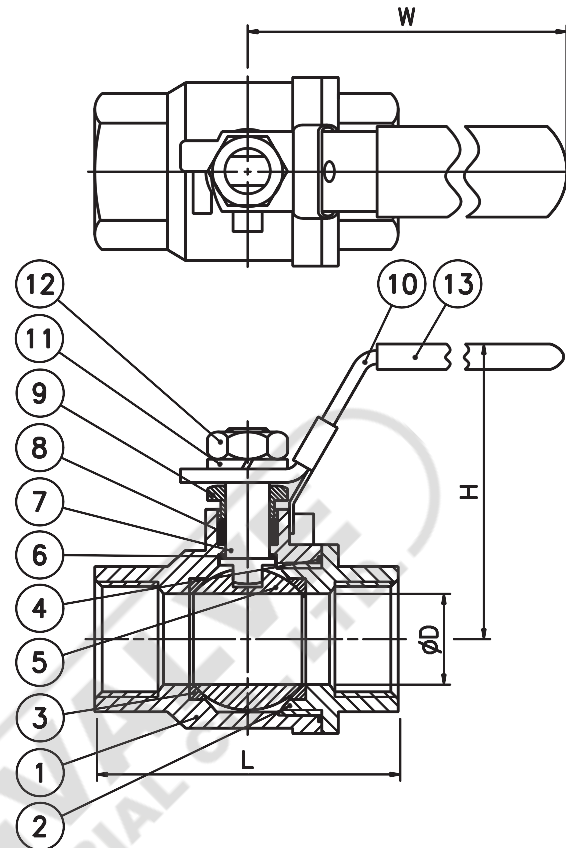


MATERIAL LIST:

ITEM	DESCRIPTION	STAINLESS STEEL	CARBON STEEL	Q'TY
1	BODY	ASTM A351 CF8M	ASTM A216 WCB	1
2	BODY CAP	ASTM A351 CF8M	ASTM A216 WCB	1
3	SEAT	PTFE / R-TFE	PTFE / R-TFE	2
4	BODY GASKET	PTFE	PTFE	1
5	BALL	ASTM A351 CF8M/316	ASTM A351 CF8/304	1
6	THRUST WASHER	PTFE	PTFE	1
7	STEM	ASTM A276 316	ASTM A276 304	1
8	STEM PACKING	PTFE	PTFE	1-2
9	GLAND	AISI 304	AISI 304	1
10	HANDLE	AISI 304	ZINC PLATED STEEL	1
11	SPRING WASHER	AISI 304	AISI 304	1
12	HANDLE NUT	AISI 304	AISI 304	1
13	SLEEVE	VINYL PLASTISOL	VINYL PLASTISOL	1

P-T RATINGS

T PTFE R R-TFE

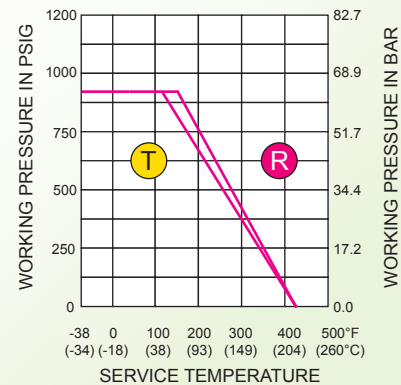

DIMENSIONS:

SIZE		ØD		L		H		W		Weights KG
IN	DN	IN	MM	IN	MM	IN	MM	IN	MM	
1/4"	8	0.45	11.5	1.97	50	2.24	57	3.74	95	0.3
3/8"	10	0.49	12.5	2.36	60	2.24	57	3.74	95	0.3
1/2"	15	0.59	15.0	2.95	75	2.24	57	3.74	95	0.3
3/4"	20	0.79	20.0	3.15	80	2.48	63	4.13	105	0.5
1"	25	1.00	25.4	3.54	90	2.76	70	4.33	110	0.7
1 1/4"	32	1.26	32.0	4.33	110	2.95	75	5.31	135	1.2
1 1/2"	40	1.50	38.0	4.72	120	3.66	93	6.10	155	1.8
2"	50	1.97	50.0	5.51	140	3.94	100	6.10	155	2.7